
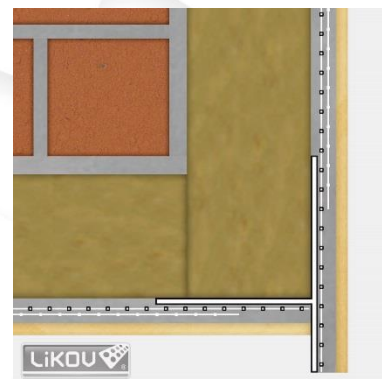


LTU

LTU drip bead with invisible drip edge and glass fibre mesh for water draining from the door and window head in thermal insulating system – ETICS

The bead can also be used for corner protection and water draining from balconies and terraces.

The bead can also be used on the bottom edge of the system where the base profile is not used for the insulation layer application.

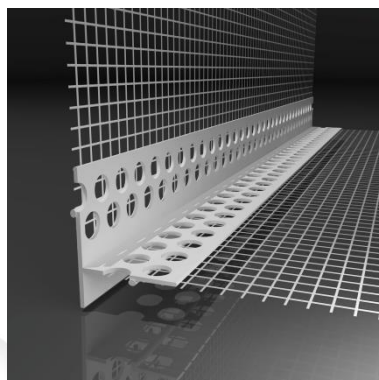

Material:

- PVC alkali and UV resistant
- Glass fibre mesh Vertex R117 complying with ETAG 004

Features:

- The fabric is welded to the profile - thermal joint
- Corner reinforcement at the upper edge of window and door openings
- Water drainage from the system, elimination of capillarity along the upper door and window part and potential plaster cracking in winter
- Invisible drip edge, under-plaster bead
- Corner reinforcement and water draining from balconies and terraces
- Corner protection against mechanical damage
- Prevents hair cracks
- Creation of ideally straight edge

Instruction for use:

Place the ledge with mesh in pre-applied mortar on insulation layer. Place the profile to the insulation layer corner, press into the plaster and level with spirit level. Then press the profile mesh into the plaster. Remove and level the excess plaster outside the mesh with a trowel. Thus we apply plaster in the profile fabric in stages. Inside corners of window and door openings are recommended to be reinforced by Reinforcing Mesh Corner.

Packaging, storage and transport:



Packed in paper boxes. Store in a dry roofed place at + 5°C ~ + 40°C. Transport in horizontal position.

Certifications and marks:

The product is not subject to any harmonized standard.

Technical data:

Bead length (L) [mm]	2000, 2500
Arm width [mm]	21
Mesh width (E x F) [mm]	100 x 100
Overlap (X/Y) [mm]	0/60
Other dimensions [mm]	See figure
Mesh fixation method	Fixation with plastic rod (absolutely inert in contact with alkali and temperature changes)

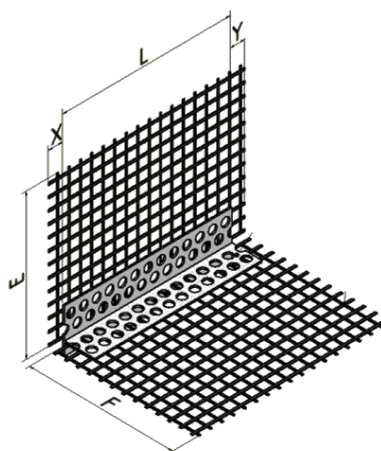

Issued on 1 February 2016.

This update invalidates all previous versions of this technical data sheet. The specified product dimensions are nominal and may range within the permitted manufacturing tolerances.